

### FEATURES & ADVANTAGES

- ✓ **14,400 LM** max lamp lumen high brightness
- ✓ **100,000+ Hours** long LED lifespan, with professional heat dissipation design
- ✓ **25 Years** long product lifespan
- ✓ **3,000+ Cycles** life LiFePO4 batteries with inbuilt Micro-BMS technologies
- ✓ **99.9%** MPPT solar charge efficiency
- ✓ **IP68** rated controller vs. IP66 rated electrical compartment
- ✓ **5+ Days** cloudy/rainy days autonomy
- ✓ **IES Type 1~5** with professional optical designs available to match different project requirements
- ✓ **Flexible & Customized Working Modes** with timer and motion sensor by programming
- ✓ **IoT Control** and online remote monitoring as optional via ZigBee or LoRaWAN



### APPLICATIONS

- ✓ Highway lighting
- ✓ Expressway lighting
- ✓ Street lighting
- ✓ Roadway lighting
- ✓ Public Areas lighting (squares, theme parks, park lots....)





### TECHNICAL SPECIFICATIONS

LED Light Source	Rated Power	24V/ 120W (56LEDs×4 modules)
	LED Brand	PHILIPS 3030 (LED Lumen: 195lm/W)
	Lumens(LM)	12000-14400lm
	Life-span	100,000 hours
	Color Temp. (CCT)	5000K (2700~6500K Full range available)
	CRI	>70
	Viewing Angle	140° (Customized Angles & IES Types Available)
Solar Panel	Power	36V/160Wp (High Efficiency Mono PV)
	Life-span	25 years
Batteries	Capacity/Type	25.6V/36AH (921.60WH) / LiFePO4 Lithium
	Life-span	8+ years (3,000 circles @ 60% DoD)
Controller	Type	MPPT / IP68/IoT Online Monitoring as Optional
	Sensor	Microwave Radar (PIR & Timing as optional)
Full Charge Time	By Solar	6 hours (STC: 1000W/m <sup>2</sup> , 25°C)
Discharge Time	Dim Mode	>65 hours
	Bright Mode	>13 hours
Working Temp.	-30°C ~ +80°C	
Mounting Height/Brackets	10~12 m/ Post Top Brackets	
Space Between Lights	40~45m	
Materials	Aluminium Alloy	
Certificate	CE / ROHS / IP66/ IK08/ TÜV-SUD ISO9001/ ISO14001	
Warranty	3 years OR 5 years	

### PERFORMANCE

Power (%)	Lamp Lumens (lm)
100%	14,400
60%	8,640
50%	7,200
30%	4,320
20%	2,880

#### Dim with Radar Motion Sensor

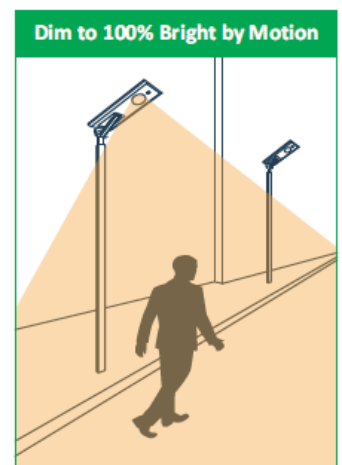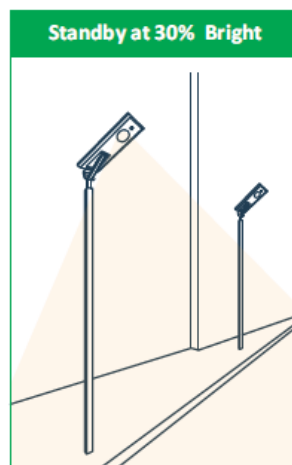


# LED SOLAR STREET LIGHT (ALL IN ONE)


Model No. ISSL-SPR-120C

[www.esavior.cn](http://www.esavior.cn)

## Dim with Timer

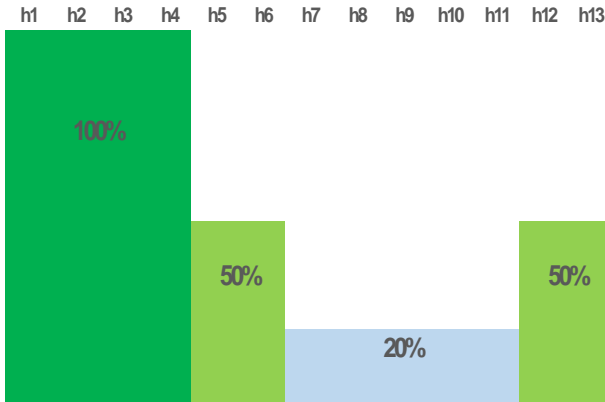

## Dim with Timer+ Motion Sensor

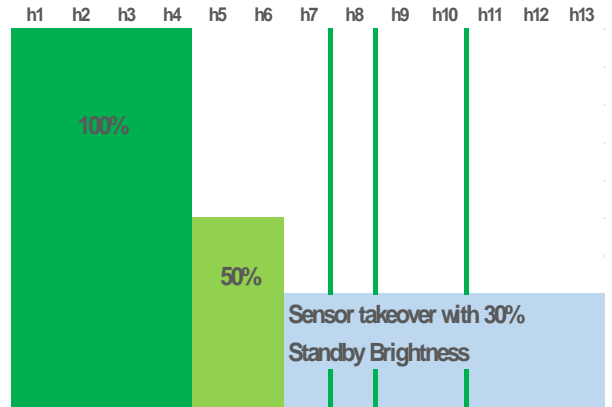

More customized control and working modes for maximum 5 sections available by programming upon customer and project requirements.

## DIMENSIONS

Items	L (mm)	W (mm)	H (mm)	N.W. (kgs)
Light Body	1805	520	55	25.00

## PACKING INFORMATION

Items	Package	L (mm)	W (mm)	H (mm)	CBM	G.W. (kgs)
Light Body	1pcs per Carton	1850	565	110	0.120	29.40
Mounting Brackets	2pcs per Carton	1130	260	260	0.076	16.90
PCS/40'HQ Container:	405 pcs	PCS/20' Container		170 pcs		

## FINISHED COLOR



## ACCESSORIES

Tube Bracket for Pole Top Mounting  
With Customize angles



PHILIPS





[www.esavior.cn](http://www.esavior.cn)


### DISTRIBUTIONS & IES TYPE

IES Type II as regular distribution, customized IES Types available upon requirements

#### Luminous Intensity Distribution Curve

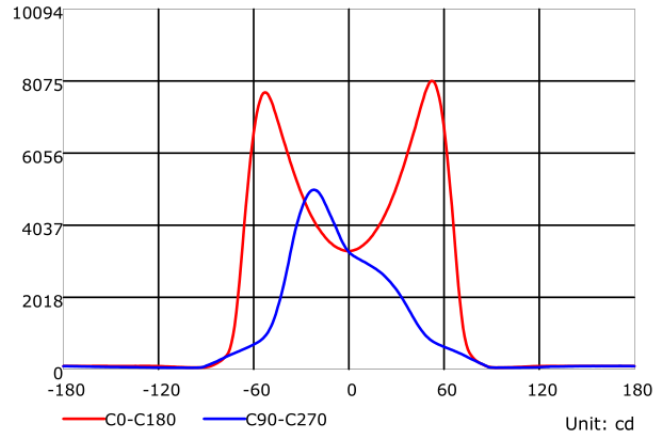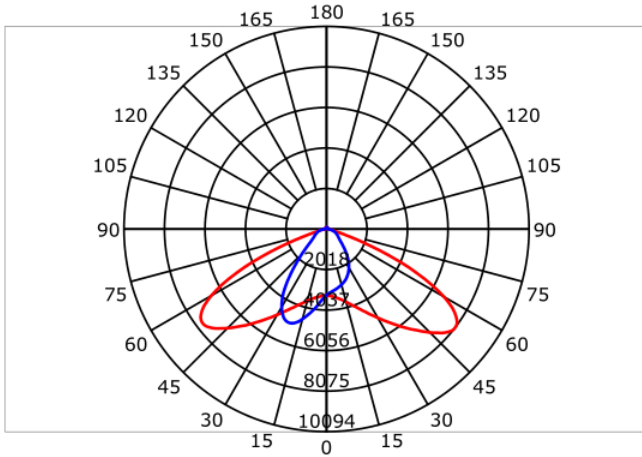

#### Illuminance at a Distance

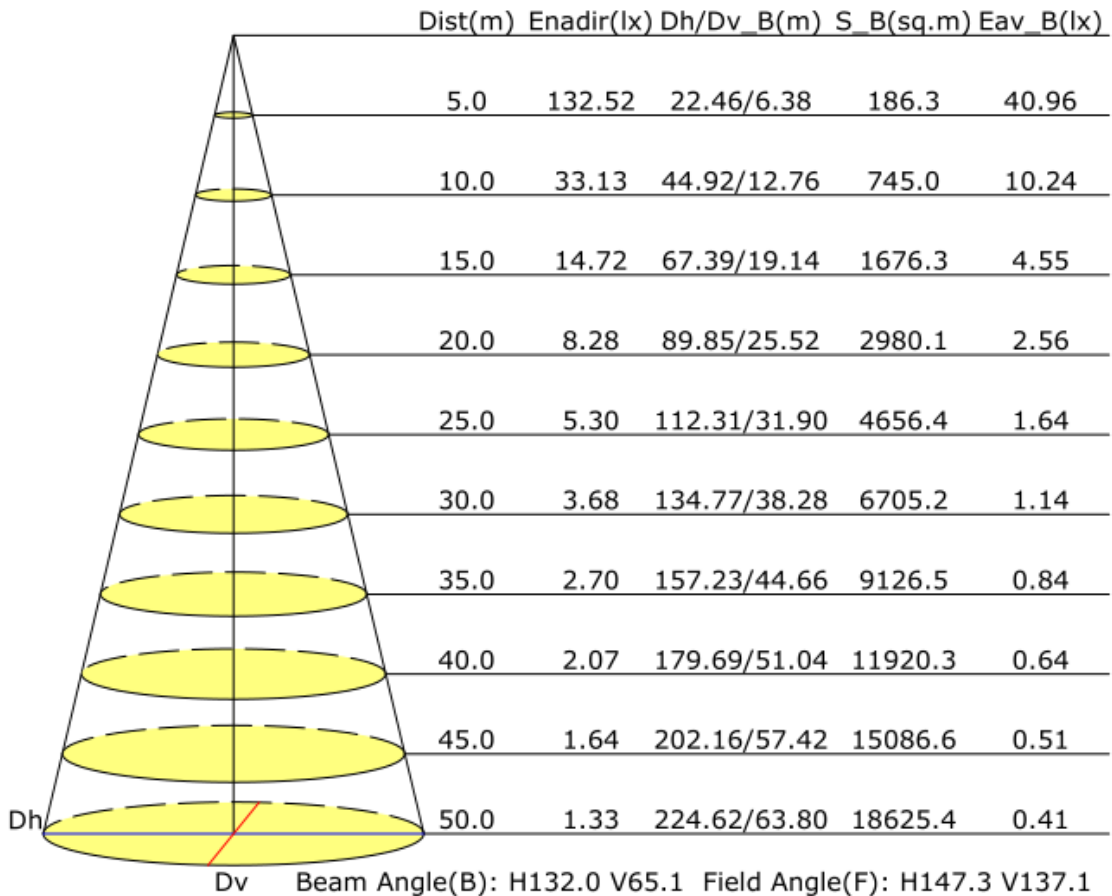


[www.esavior.cn](http://www.esavior.cn)

### DIALUX SIMULATION REPORT

Street Profile(Tarmac: R3, q0: 0.070)

Pole Height :12m ; Pole Distance :40m; Road Width: 18m; Lanes: 6;

### Luminaire Arrangements

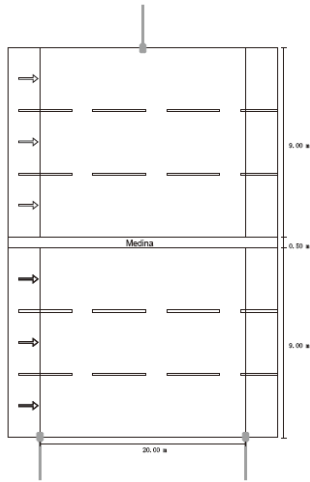

### Valuation Field Roadway / Isolines (E)

