

FEATURES & ADVANTAGES

- ✓ **18,00 LM** max lamp lumen high brightness
- ✓ **100,000+ Hours** long LED lifespan, with professional heat dissipation design
- ✓ **25 Years** long product lifespan
- ✓ **3,000+ Cycles** life LiFePO4 batteries with inbuilt Micro-BMS technologies
- ✓ **99.9%** MPPT solar charge efficiency
- ✓ **IP68** rated controller vs. IP66 rated electrical compartment
- ✓ **5+ Days** cloudy/rainy days autonomy
- ✓ **IES Type 1~5** with professional optical designs available to match different project requirements
- ✓ **Flexible & Customized Working Modes** with timer and motion sensor by programming



APPLICATIONS

- ✓ Garden lighting
- ✓ Residential lighting
- ✓ Minor street lighting
- ✓ Roadway lighting
- ✓ Patchway lighting
- ✓ Public Areas lighting (squares, theme parks, park lots....)





TECHNICAL SPECIFICATIONS

LED Light Source	Rated Power	12V/15W (30LEDsx1 module)
	LED Brand	PHILIPS 3030 (LED Lumen: 195lm/W)
	Lumens(LM)	1500-1800lm
	Life-span	100,000 hours
	Color Temp. (CCT)	5000K (2700~6500K Full range available)
	CRI	>70
	Viewing Angle	140° (Customized Angles & IES Types Available)
Solar Panel	Power	18V/30Wp (Monocrystalline PV)
	Life-span	25 years
Batteries	Capacity/Type	12.8V/12AH (153.60WH) / LiFePO4 Lithium
	Life-span	8+ years (3,000 circles @ 60% DoD)
Controller	Type	MPPT / Waterproof class: IP68
	Sensor	Microwave Radar (PIR & Timing as optional)
Full Charge Time	By Solar	5 hours (STC: 1000W/m ² , 25°C)
Discharge Time	Dim Mode	>90 hours
	Bright Mode	>18 hours
Working Temp.	-30°C ~ +80°C	
Mounting Height/Brackets	4~5 m/ Clamp Bracket	
Space Between Lights	12~15m	
Materials	Aluminium Alloy	
Certificate	CE / ROHS / IP66/ IK08/ TÜV-SUD ISO9001/ ISO14001	
Warranty	3 years OR 5 years	

PERFORMANCE

Power (%)	Lamp Lumens (lm)
100%	1,800
60%	1,080
50%	900
30%	540
20%	360

Dim with Radar Motion Sensor

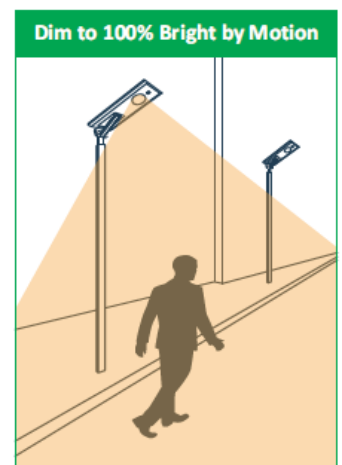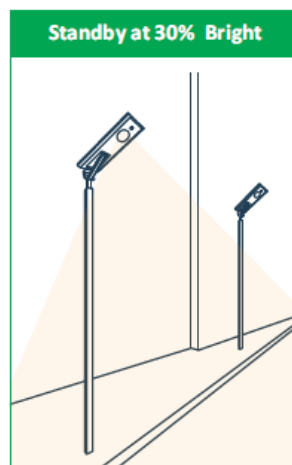


LED SOLAR STREET LIGHT (ALL IN ONE)


Model No. ISSL-SPR-015C

www.esavior.cn

Dim with Timer

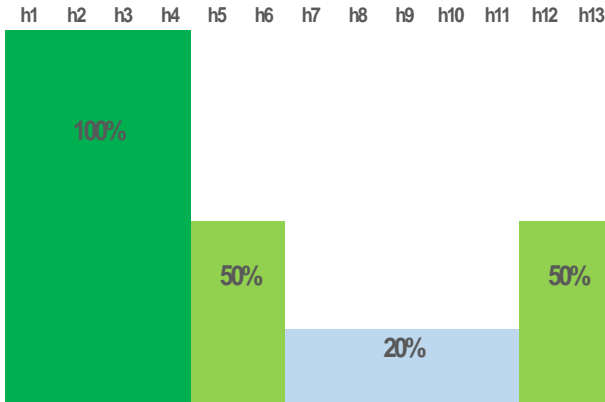

Dim with Timer+ Motion Sensor

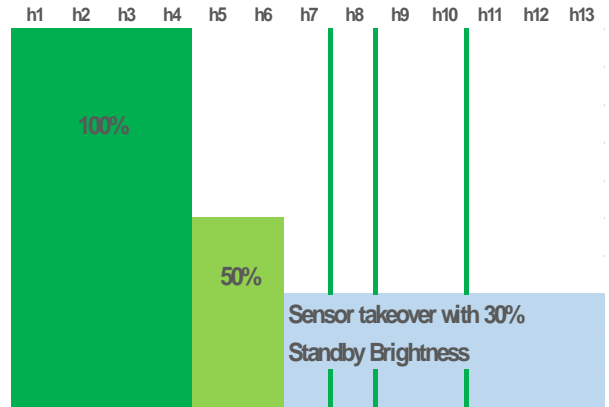

More customized control and working modes for maximum 5 sections available by programming upon customer and project requirements.

DIMENSIONS

Items	L (mm)	W (mm)	H (mm)	N.W. (kgs)
Light Body	572	292	55	4.70

PACKING INFORMATION


Items	Package	L (mm)	W (mm)	H (mm)	CBM	G.W. (kgs)
Light + Brackets	3pcs per Carton	680	375	355	0.090	19.80
Light Body	2pcs per Carton	735	350	175	0.045	12.60
Mounting Brackets	8pcs per Carton	380	320	230	0.028	13.90
PCS/40'HQ Container:	2460 pcs	PCS/20' Container	1040 pcs			

FINISHED COLOR



ACCESSORIES

Clamp Brackets For Pole/ Wall Mounting

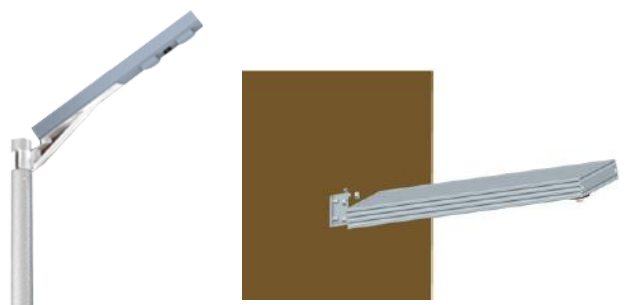

PHILIPS




www.esavior.cn

DISTRIBUTIONS & IES TYPE

IES Type II as regular distribution, customized IES Types available upon requirements

Luminous Intensity Distribution Curve

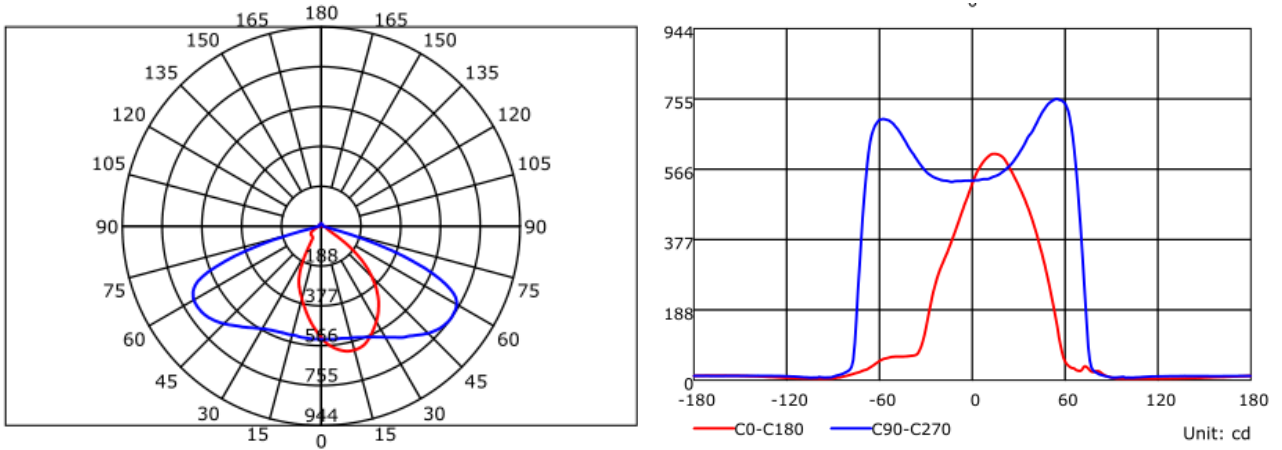

Illuminance at a Distance

