

FEATURES & ADVANTAGES

- ✓ **600 LM** max lamp lumen high brightness
- ✓ **100,000+ Hours** long LED lifespan, with professional heat dissipation design
- ✓ **25 Years** long product lifespan
- ✓ **3,000+ Cycles** life LiFePO4 batteries with inbuilt Micro-BMS technologies
- ✓ **99.9%** MPPT solar charge efficiency
- ✓ **IP68** rated controller vs. IP66 rated electrical compartment
- ✓ **5+ Days** cloudy/rainy days autonomy
- ✓ **IES Type 1~5** with professional optical designs available to match different project requirements
- ✓ **Flexible & Customized Working Modes** with timer and motion sensor by programming



APPLICATIONS

- ✓ Garden lighting
- ✓ Residential community lighting
- ✓ Side street lighting
- ✓ Walkway/ Pathway lighting
- ✓ Public Areas lighting (squares, theme parks, park lots....)





TECHNICAL SPECIFICATIONS

LED Light Source	Rated Power	12V/5W (30LEDs x 1 Module)
	LED Brand	PHILIPS 3030 (LED Lumen: 195lm/W)
	Lumens(LM)	500-600lm
	Life-span	100,000 hours
	Color Temp. (CCT)	5000K (2700~6500K Full range available)
	CRI	>70
	Viewing Angle	140° (Customized Angles & IES Types Available)
Solar Panel	Power	18V/10Wp (Monocrystalline PV, Cell Efficiency >)
	Life-span	25 years
Batteries	Capacity/Type	12.8V/6AH (76.80WH) / LiFePO4 Lithium
	Life-span	8+ years (3,000 cycles @ 60% DoD)
Controller	Type	MPPT / Waterproof class: IP68
	Sensor	Microwave Radar (PIR & Timing as optional)
Full Charge Time	By Solar	7 hours (STC: 1000W/m ² , 25°C)
Discharge Time	Dim Mode	>135 hours
	Bright Mode	>27 hours
Working Temp.	-30°C ~ +80°C	
Mounting Height/Brackets	3 m / Clamp Bracket	
Space Between Lights	8~10m	
Materials	Aluminium Alloy	
Certificate	CE / ROHS / IP66/ IK08/ TÜV-SUD ISO9001/ ISO14001	
Warranty	3 years OR 5 years	

PERFORMANCE

Power (%)	Lamp Lumens (lm)
100%	600
60%	360
50%	300
30%	180
20%	120

Dim with Radar Motion Sensor

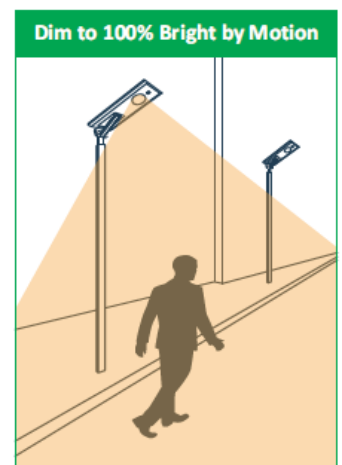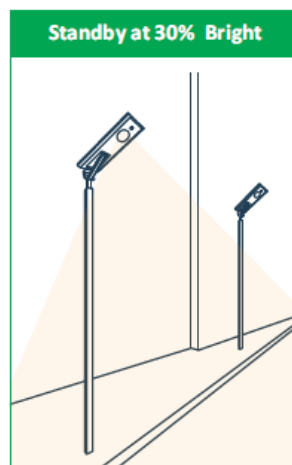


LED SOLAR STREET LIGHT (ALL IN ONE)


Model No. ISSL-SPR-005C

www.esavior.cn

Dim with Timer

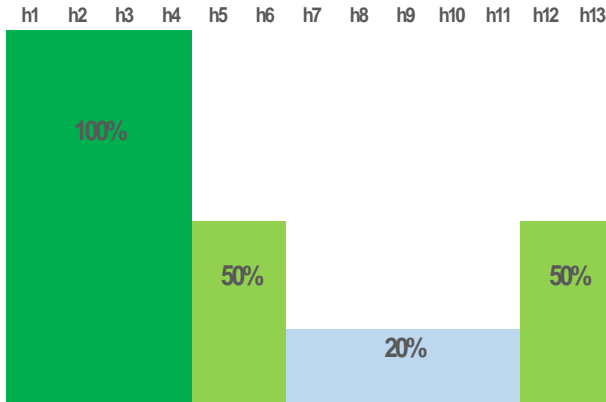

Dim with Timer+ Motion Sensor

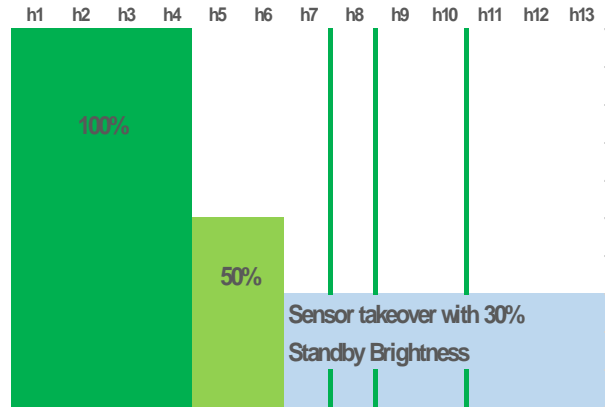

More customized control and working modes for maximum 5 sections available by programming upon customer and project requirements.

DIMENSIONS

Items	L (mm)	W (mm)	H (mm)	N.W. (kgs)
Light Body	320	292	55	2.75

PACKING INFORMATION


Items	Package	L (mm)	W (mm)	H (mm)	CBM	G.W. (kgs)
Light + Brackets	3pcs per Carton	510	335	330	0.056	13.10
PCS/40'HQ Container:	3430 pcs	PCS/20' Container		1450pcs		

FINISHED COLOR



ACCESSORIES

Clamp Brackets For Pole/ Wall Mounting

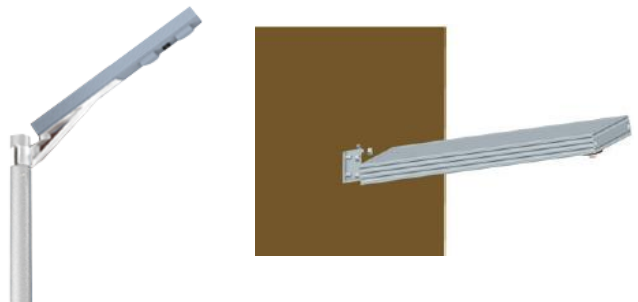

PHILIPS

